



Osprey Assembly Instructions

Your **Jackite™** Osprey is tough, constructed of Tyvek® and a solid fiberglass spar. It is water resistant and highly tear resistant, and will provide you with many hours of flying pleasure.

In keeping with tradition, the **Jackite™** Osprey original was painted using brush and India ink.

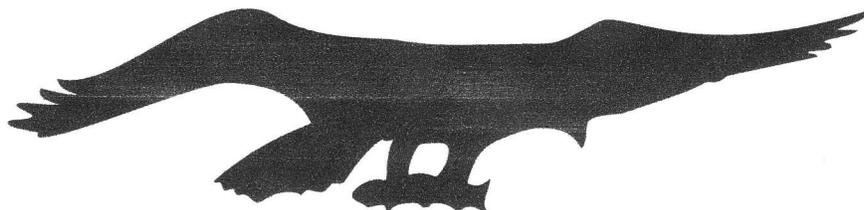

Head and Body

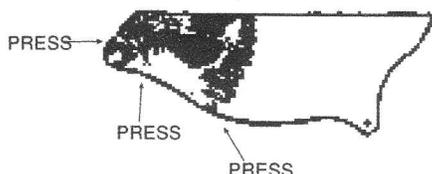


STEP 1: Peel tape along inside edge of head and body. Press together to form head and body.

Legs and Fish



STEP 2: Bend fish and insert in feet (bend against double claw).

Rod

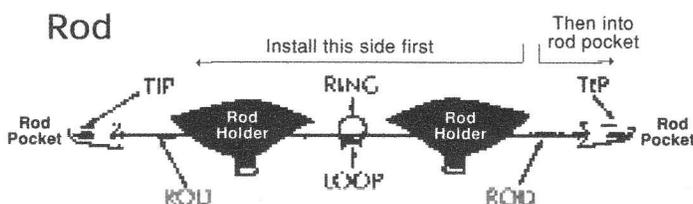

STEP 3: Insert rod under rod holder, thru ring, under rod holder and into pocket. Then install other end of rod into other pocket. Aft ring is not used for flight.

Fuzz Pak: The plastic bag of Fuzz is to keep the head of the Incredible Jackite Osprey from bending in the wind. Stuff bag and fuzz into body and tape into place.

Line: Use 12 lb. test kite line or a Jackite 7' Line Rig (included).

Initial Flight: Roll the leading edge of the wings over the rod for best flight. If one wing flies slightly low place a paperclip on the high wing just outside the staple for a while.

Pole Flying like a windsock: Drive a stake into the ground; attach pole to stake. Attach one end of Line Rig to eyelet at the top of pole; attach the other end of the Line Rig to the beak of the bird.

Storage: Remove the rod. Hang by the opening in the beak.

Display: You may desire to share the beautiful design of the Jackite with others as a decoration for your home or office. It's a real conversation piece. Attach string from fore white ring to aft white ring with a loop midpoint of the string. Suspend by the loop. ENJOY!